


XTU Tilt Unit





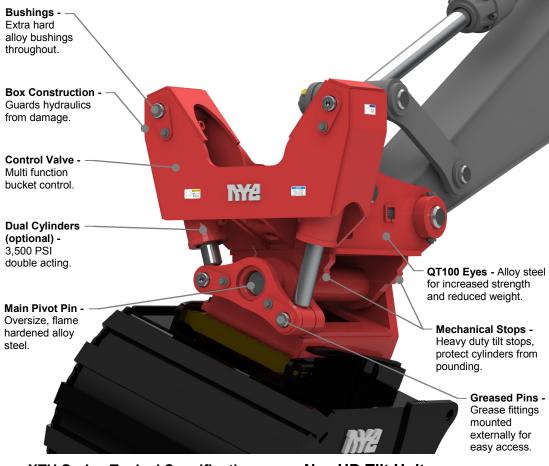

XTU Series Typical Specifications

Carrier	Model	Height mm [in]	Weight kg [lb]
13 - 17 t	15TU	450 [18]	431 [950]
16 - 24 t	20TU	570 [22]	506 [1,115]
22 - 28 t	25TU	685 [27]	567 [1,250]
26 - 38 t	30TU	787 [31]	624 [1,375]
35 - 50 t	40TU	928 [36.5]	680 [1,500]

nye.ca/twist

All Nye products are warranted to be free of defects in materials and workmanship for a period of 2 years or 2.000 hours.

Specifications subject to change.



nye.ca/terms

Nye HD Tilt Units:

Heavy duty tilt function for existing hydraulic excavator attachments.

These ruggedly designed tilt units feature high holding and breakaway torque, low maintenance and have a 90° tilt range, 45° left and 45° right.

An optional internally mounted load control valve simplifies hydraulic installation by managing all major hydraulic functions and provides convenient hose routing on either, or both sides of the unit.

Nye tilt units are easy to install and do not require any welding or modification to the base machine. Safe, silent to operate, available in quick coupler and pin grabber compatible versions.

For more information:

Call 905 897 2311 or visit nye.ca.

Hydraulics

Control Valve Features:

- Load holding (bucket stays put).
- Pressure relief (prevents cylinder damage).
- Speed control (prevents slamming).
- Hose management (multiple configurations left, right, or one hose on each side).

Direct Pin



Quick Pin



Stealth QC



Scan for videos -





Nye Manufacturing Ltd.

3585 Mavis Rd. Mississauga, ON L5C 1T7 Canada +1 905 897 2311

sales@nye.ca nye.ca



Nye is a proud family owned Canadian business; going strong for over 60 years