
T-Rex Pulverizer



Features and Benefits

- Replaceable pin-on crushing teeth.
- Heavy duty hydraulic brace cylinder articulates mandible, providing increased. efficiency during crushing.
- Meshing incisors allow for precise picking and sorting of reclaimable materials.
- Cylinder rod protected by sliding guard.
- Pin grabber and quick coupler models available.

Gravity Feed Jaws

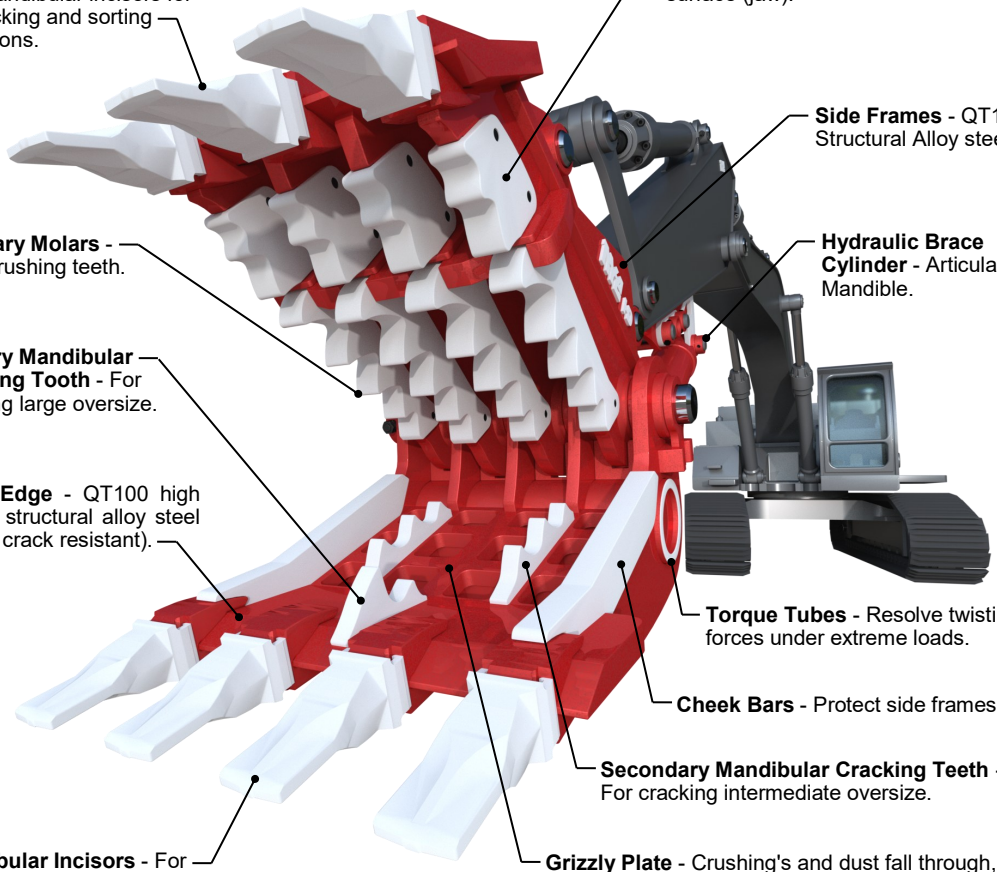

Excellent for sorting



Scoop Debris



TRX Series Typical Specifications

Carrier	Model	Opening mm [in]	Weight kg [lb]
16 - 24 t	TRX200	1,683 [66]	2,537 [5,593]
22 - 28 t	TRX250	1,930 [76]	2,909 [6,413]
26 - 38 t	TRX350	2,254 [89]	3,398 [7,491]
35 - 50 t	TRX450	2,550 [100]	3,844 [8,475]
48 - 60 t	TRX550	3,060 [121]	4,613 [10,170]
59 - 90 t	TRX750	3,443 [136"]	5,189 [11,440]

nye.ca/t-rex

All Nye products are warranted to be free of defects in materials and workmanship for a period of 2 years or 2,000 hours.
Specifications subject to change.

nye.ca/terms

Nye TRX Concrete Pulverizer:

Nye engineers studied the mechanics of how carnivores crush solid bone with their teeth then coupled that with their extensive knowledge in the demolition industry to come up with the "T-Rex".

Primarily designed for crushing operations, this new type of secondary processor can also be used for precision picking and sorting of reclaimable materials.

Precision meshing incisors allow the operator to accurately separate reinforcing rod from concrete.

Forward loading design lends itself nicely as a shovel to scoop up and sort through debris piles with ease.

For more information call us at 905 897 2311 or click: **nye.ca**.

Nye Manufacturing Ltd.
3585 Mavis Rd.
Mississauga, ON L5C 1T7
Canada
+1 905 897 2311
sales@nye.ca nye.ca

Nye is a proud family owned Canadian business; going strong for over 75 years


Put our expertise to work for you!

Scan for videos →


T-Rex Specifications

CARRIER [x1000lbs]	MODEL¥	WEIGHT	TEETH*	JAW DEPTH (A)	LOWER JAW WIDTH (B)	MAX. JAW OPENING (C)	GRIZZLY OPENINGS (D)	CYLINDER (E)
16 - 24 t [35 - 53]	TRX200	2,537 [5,593]	V33SYL X 5	1,051 [41.4]	759 [29.9]	1,683 [66.3]	102 [4]	4" Bore 34" Stroke
	TRX200U					1632 [64.3]		
22 - 28 t [48 - 62]	TRX250	2,909 [6,413]	V39SYL X 5	1,205 [47.4]	871 [34.3]	1,930 [76]	114 [4.5]	5" Bore 40" Stroke
	TRX250U					1,871 [73.7]		
26 - 38 t [57 - 84]	TRX350	3,398 [7,491]	V39SYL X 7	1,399 [55.1]	1,020 [40.2]	2,254 [88.7]	140 [5.5]	5" Bore 40" Stroke
	TRX350U					2,185 [86]		
35 - 50 t [77 - 110]	TRX450	3,844 [8,475]	V51SYL X 7	1,592 [62.7]	1,150 [45.3]	2,550 [100.4]	155 [6]	6" Bore 42" Stroke
	TRX450U					2,472 [97.3]		
48 - 60 t [106 - 132]	TRX550	4,613 [10,170]	V59SYL X 7	1,910 [75.2]	1,380 [54.3]	3,060 [120.5]	178 [7]	6" Bore 42" Stroke
	TRX550U					2,966 [116.8]		
59 - 90 [130 - 198]	TRX750	5,189 [11,440]	V61SYL X 7	2,149 [84.6]	1,553 [61.1]	3,443 [135.6]	203 [8]	7" Bore 64" Stroke
	TRX750U					3,337 [131.4]		

¥ U = Pin Grabber ** Customer's choice (as permits)* *Spec's subject to change* *Units of Measure: kg [lb] and mm [in]*

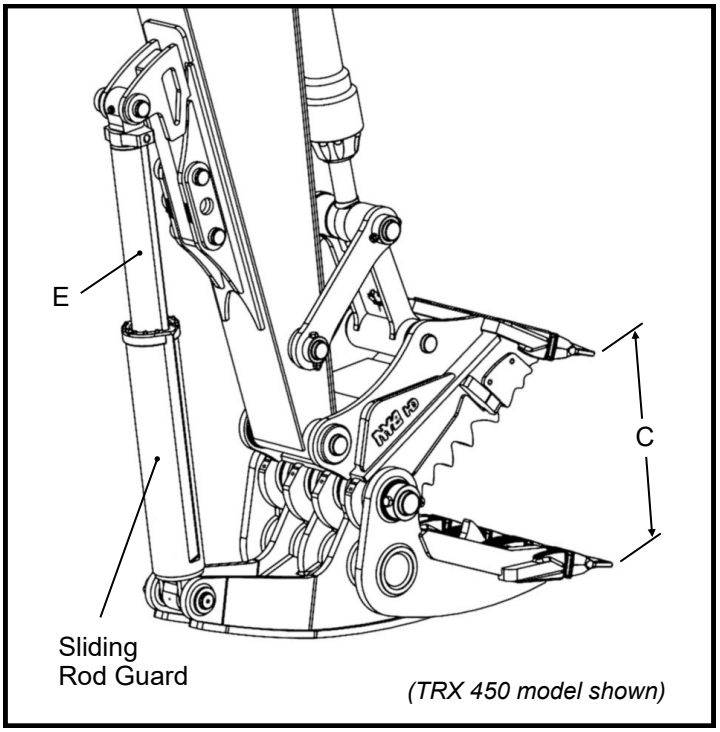

(TRX 450 model shown)

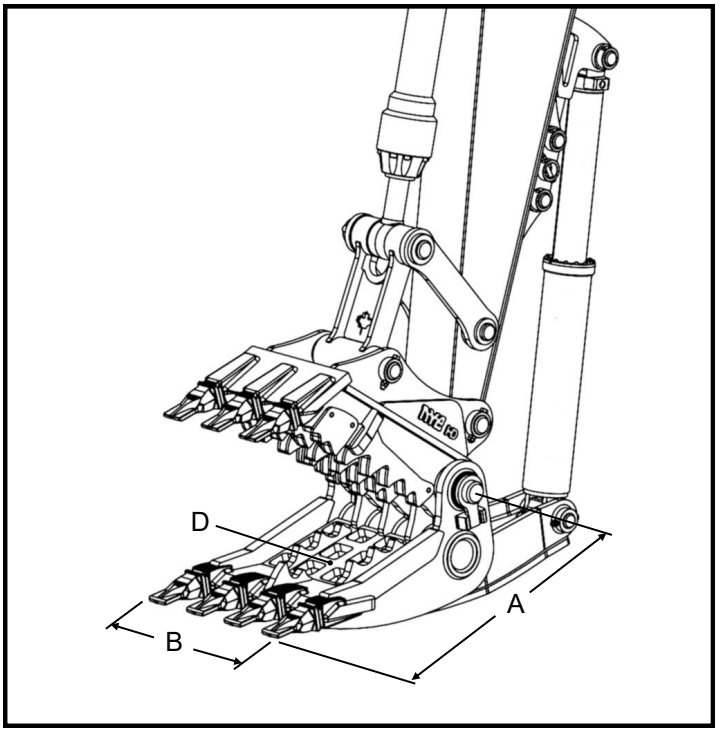

Nye Manufacturing Ltd.
3585 Mavis Rd.
Mississauga, ON L5C 1T7
Canada
+1 905 897 2311
sales@nye.ca nye.ca

Nye is a proud family owned Canadian business; going strong for over 75 years

Scan for videos →

Put our expertise to work for you!